Einführung in die Knöpfe

AN (für 4 Sek. drücken) / EINGABE / SCHIESSEN

HOCHSCHALTEN / + / BESCHLEUNIGEN

HERUNTERSCHALTEN / - / BREMSEN

AUS (für 4 Sek. drücken) / MENÜ / ZURÜCK

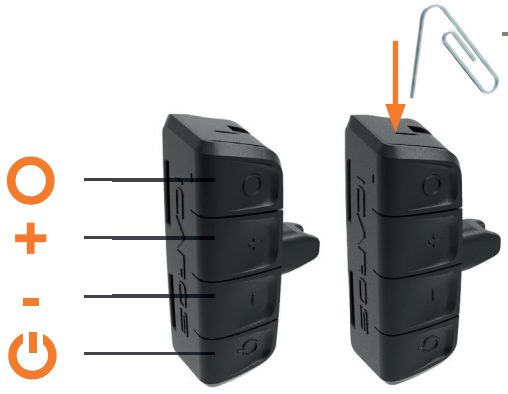

Drücken Sie mit einem langen, dünnnen Gegenstand den **RESET-Knopf** im inneren des Gehäuses (nur wenn notwendig)

Wie befestigt man den Controller?

Bei dem Clip-System:
1.) Platzieren Sie den Controller auf den Haltebacken
2.) Drücken Sie den Contoller nach unten um ihn zu arretieren

Um ihn zu lösen - drehen Sie den Vorgang um:
Drücken Sie den Controller in die mittlere Position (nach oben) um ihn zu entsperren und nehmen Sie in ab

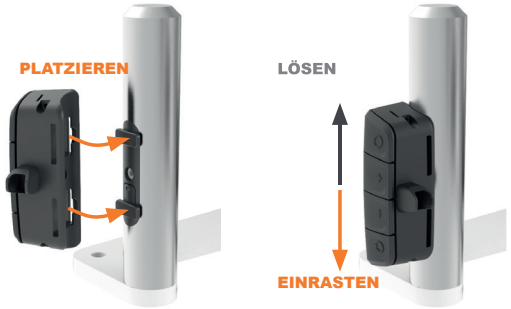

Bei der Klettband-Version:

1.) Platzieren Sie den Controller auf dem rechten Griff
2.) Richten Sie Ihn aus, so dass die Knöpfe nach vorne zeigen
3.) Schließen Sie die Klettbänder, so dass Sie fest sind

Was bedeuten die Lichtsignale?

Grünes Licht (blinkend)
Controller ist per USB Kabel, aber nicht mit dem Spiel verbunden

Grünes Licht (konstant)
Controller ist per USB Kabel mit dem Spiel verbunden

Blaues Licht (blinkend)
Bluetooth Modus Controller ist nicht verbunden

Blaues Licht (konstant)
Bluetooth Modus Controller ist per Bluetooth mit dem Spiel verbunden

Rotes Licht (blinkend)
Controller muss wieder Aufgeladen werden Schließen Sie ihn per USB Kabel an eine geeignete Stromquelle an

Wichtige Informationen

- Eine Verlängerung des USB Kabels funktioniert nur mit einer **aktiven USB 2.0 Verlängerung**
- Wird der Controller von ihrem Rechner nicht automatisch erkannt, stellen Sie sicher, dass der Controller-Treiber installiert ist. Wir empfehlen den Treiber unter folgendem Link herunterzuladen: **https://www.ftdichip.com/Drivers/D2XX.htm** (ICAROS übernimmt keine Verantwortung für den Inhalt dieser Seite) Installation: Heruntergeladenen Ordner **CDM v2.12.28** Extrahieren, Rechtsklick und Installieren auf **ftdibus** und **ftdiport**

Introduction to the buttons

ON (press for 4 seconds) / ACCEPT / SHOOT

SWITCH UP / + / ACCELERATE

SWITCH DOWN / - / DECELERATE

OFF (press for 4 seconds) / MENU / BACK

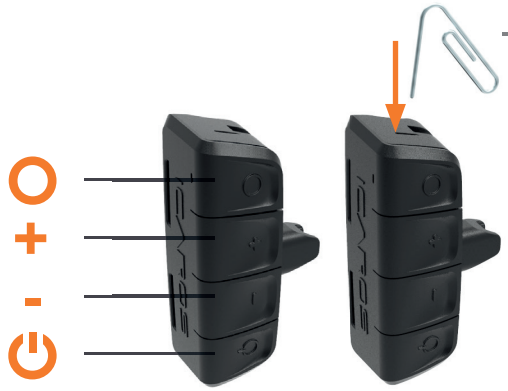

Insert long, thin object to press the hidden **RESET-button** (only operate this button if needed)

How to mount the controller to the ICAROS device

For Clip-System:
1.) Place the controller on the fins at the handle
2.) Push the controller downwards to lock

To unmount - reverse the process:
Push the controller into the middle position (upwards) and take it off

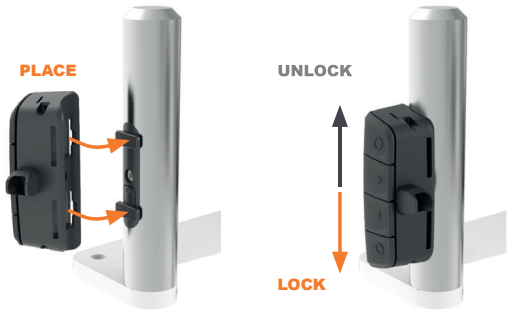

For Velcro-Version:

1.) Place the controller on the right handle
2.) Adjust it - so that the buttons face straight to the front
3.) Close the velcro tapes firmly

What do the LED light signals mean?

Green light (flashing)
connected via USB cable, but not paired to the game

Green light (continuous)
Controller connected via USB cabel and paired to the game

Blue light (flashing)
Bluetooth Mode
Controller not connected

Blue light (continuous)
Bluetooth Mode
Controller paired to the game via Bluetooth

Red light (flashing)
Controller needs to be recharged
Connect it to a proper power supply via USB cabel

Important information

- An extension of the USB cable only works with an **active USB 2.0 extension**.
- If the controller is not automatically detected by your computer, make sure that the controller driver is installed.
  We recommend downloading the driver from the following link:
  https://www.ftdichip.com/Drivers/D2XX.htm (ICAROS is not responsible for the content of this page).
  Installation: Extract downloaded folder **CDM v2.12.28**, right click and install on **ftdibus** and **ftdiport**